


ELNSM66M-HC-HV-N Series

**MBB HC BIFACIAL
RECTANGULAR TOPCON CELL
PV MODULE
605 - 630W**

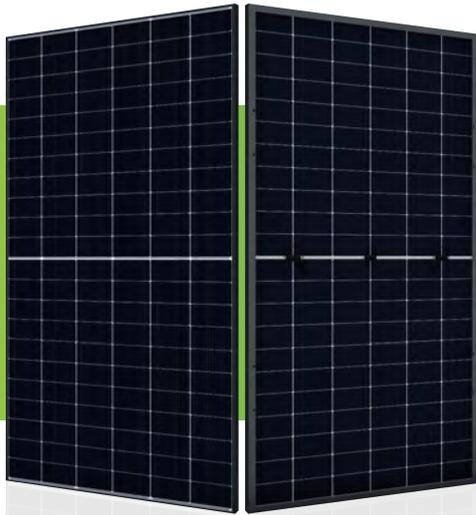

Bifacial N Type Glass Glass Series

Sirius redefined the high-efficiency module series by integrating 182*210 mm silicon wafers with multi-busbar and half-cutcell technologies. Sirius combined creative technology with 182*210 mm N Type module. This caused effectively and extremely improved the module efficiency and power output.

KEY FEATURES



With the composite frame, lower carbon footprint, severe weather endurance, enhanced PID protection and exceptional corrosion shielding.
(These features are only valid when the composite frame is used.)



Less mismatch to get more power.



Less power loss by minimizing the shading impact.



Competitive low light performance.



SMBB Technology
Better light trapping and current collection to improve module power output and reliability.



In stringent environment condition:
• Sand, acid, salt and hailstones
• 2400 Pa wind load and 5400 Pa snow load.
• PID free



3 times EL test to ensure best quality

QUALITY SYSTEM

- ISO 9001:2015 / Quality Management System
- ISO 14001:2015 / Environmental Management System
- ISO 45001: 2018 / Occupation Health Safety Management System
- ISO 50001:2018 / Energy Management System
- ISO 27001:2013 / Information Security Management System
- ISO 10002:2018 / Customer Satisfaction Management System
- ISO 37001:2016 / Anti-bribery Management Systems
- ISO 26000:2021 / Social Responsibility Management System

PRODUCT CERTIFICATION



IEC 61215 / 61730 , IEC 62804 (PID)
TS EN 61215 , TS EN 61730
UL 61730-1 , UL 61730-2


WARRANTY



12 YEARS
Guarantee On Product



30 YEARS
Linear Power Output Warranty

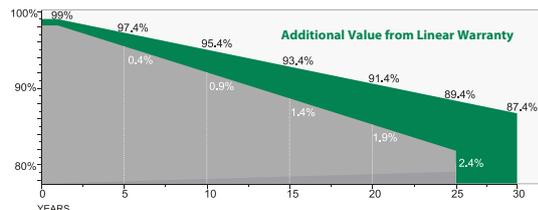




SIRIUS

powered by **ELiN**



ELNSM66M-HC-HV-N Series

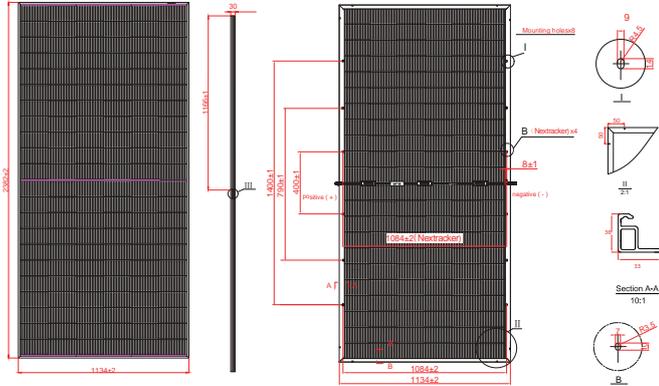

MECHANICAL SPECIFICATIONS

External Dimension	2382 x 1134 x 30 mm
Weight	34.3 kg
Solar Cells	Topcon 182 x 105 mm (132 pcs)
Glass	Dual Glass 2.0+2.0 mm AR coating tempered glass, low iron
Frame*	Composite(black)
Junction Box	IP68,3 diodes
Output Cables	4.0mm ² (IEC), 12 AWG (UL)
Cable Length**	350 mm (+) / 350 mm (-) or Customized Length
Packing Configuration	36pcs / Pallet, 720 pcs / 20 Pallet / 40' Container

*The frame is constructed from composite materials. If an aluminum frame is selected, it can be customized as silver/black.
**Output cable lengths should be specified at the time of order.

ELECTRICAL SPECIFICATIONS (STC)

Module Type: ELNSM66M-HC-HV-N

	605	610	615	620	625	630
Maximum Power-P _{mp} (W)	605	610	615	620	625	630
Open Circuit Voltage-V _{oc} (V)	48.72V	48.92V	49.12V	49.32V	49.52V	49.72V
Short Circuit Current-I _{sc} (A)	15.82A	15.87A	15.92A	15.97A	16.02A	16.07A
Maximum Power Voltage-V _{mp} (V)	40.51V	40.71V	40.91V	41.11V	41.31V	41.51V
Maximum Power Current-I _{mp} (A)	14.94A	14.99A	15.04A	15.09A	15.14A	15.19A
STC Module Efficiency-η _m (%)	22.40%	22.58%	22.77%	22.95%	23.14%	23.32%

*Measurement Tolerance +/- 3%
STC Irradiance 1000 W/m², module temperature 25°C, AM=1.5
BNPI: front 1000 W/m²/rear 135 W/m²

ELECTRICAL SPECIFICATIONS (BNPI)

Module Type: ELNSM66M-HC-HV-N

	670	676	681	687	693	698
Maximum Power-P _{mp} (W)	670	676	681	687	693	698
Open Circuit Voltage-V _{oc} (V)	48.80V	49.00V	49.20V	49.40V	49.60V	49.80V
Short Circuit Current-I _{sc} (A)	17.53A	17.58A	17.64A	17.69A	17.75A	17.81A
Maximum Power Voltage-V _{mp} (V)	40.59V	40.79V	40.99V	41.19V	41.39V	41.59V
Maximum Power Current-I _{mp} (A)	16.51A	16.57A	16.62A	16.68A	16.73A	16.78A

BNPI: Front Side 1000 W/m², Rear Side 135 W/m².

REAR SIDE POWER GAIN (ELNSM48M-HC-HV-N-610)

Module Type ELNSM66M-HC-HV-N

	10%	15%	20%	25%	30%
Power Gain	10%	15%	20%	25%	30%
Maximum Power-P _{mp} (W)	671	702	732	763	793
Open Circuit Voltage-V _{oc} (V)	48.92	48.92	48.92	48.92	48.92
Short Circuit Current-I _{sc} (A)	17.46	18.25	19.04	19.84	20.63
Maximum Power Voltage-V _{mp} (V)	40.71	40.71	40.71	40.71	40.71
Maximum Power Current-I _{mp} (A)	16.49	17.24	17.99	18.74	19.49

TEMPERATURE PARAMETERS

Power Tolerance (W)	(0, +4.99)
P _{max} Temperature Coefficient	-0.29 %/°C
V _{oc} Temperature Coefficient	-0.25 %/°C
I _{sc} Temperature Coefficient	+0.046 %/°C

APPLICATION CONDITIONS

Maximum System Voltage	1500 VDC
Maximum Series Fuse Rating	30A
Operating Temperature	-40~+85°C
Nominal Operating Cell Temperature	45±2°C
Bifaciality	80%±5%
Mechanical Load	Front Side 5400 Pa / Rear Side 2400 Pa
I _{sc} Temperature Coefficient	UL Type 29 / C Class

Specifications included in this datasheet are subject to change without prior notice.
Made in Türkiye.

I - V CURVE

